

PRODUCT FAMILY:

SHL

MAX. LOADING CAPACITY:

## 8.000 kg


The SHL range, made in length 1.5mt and width 2.2mt, has been specially designed to allow the overcoming of height differences from 100 to 300mm, such as containers, guaranteeing the maximum safety of transit of vehicles thanks to its width. The SHL1 and SHL2 models are characterized by a special non-slip surface, certified R13, and are suitable for loading manual trucks, manual and electric pallet trucks.

The SHL8 model is made of high-strength profiles and is designed to allow the loading of heavier vehicles, such as forklifts or operating machines with rubber wheels or tracks. All models are equipped with a standard head-connection that lays directly on the loading surface. The range is only available without raised edges.

ANCHORING SYSTEMS: Carabiner clip with steel chain (standard)

HANDLING SYSTEMS: Nylon handles (on request)



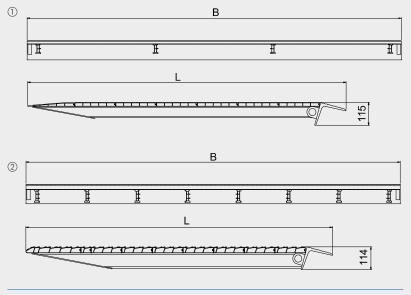



- ① MODELS SHL1 AND SHL2
- ② MODEL SHL8

Model	Item code	Loading capacity <b>kg</b> with 1000 mm wheelbase	Length <b>L mm</b>	Width <b>B mm</b>	Min./max. loading height <b>mm</b>	Weight <b>kg</b>
SHL1/100	MM530SL.0100	1000	1562	2200	100 / 119	57
SHL1/120	MM530SL.0120	1000	1562	2200	120 / 139	58
SHL1/140	MM530SL.0140	1000	1562	2200	140 / 159	58
SHL1/160	MM530SL.0160	1000	1561	2200	160 / 189	58
SHL1/190	MM530SL.0190	1000	1561	2200	190 / 219	58
SHL1/220	MM530SL.0220	1000	1561	2200	220 / 259	58
SHL1/260	MM530SL.0260	1000	1560	2200	260 / 300	58
SHL2/100	MM520SL.0100	2000	1562	2200	100 / 119	66
SHL2/120	MM520SL.0120	2000	1562	2200	120 / 139	66
SHL2/140	MM520SL.0140	2000	1562	2200	140 / 159	66
SHL2/160	MM520SL.0160	2000	1561	2200	160 / 189	66
SHL2/190	MM520SL.0190	2000	1561	2200	190 / 219	67
SHL2/220	MM520SL.0220	2000	1561	2200	220 / 259	67
SHL2/260	MM520SL.0260	2000	1560	2200	260 / 300	67

Model	Item code	Loading capacity <b>kg</b> with 1500 mm wheelbase	Length <b>L mm</b>	Width <b>B mm</b>	Min./max. loading height <b>mm</b>	Weight <b>kg</b>
SHL8/140	MM510SL.0140	8000	1503	2200	140 / 159	88
SHL8/160	MM510SL.0160	8000	1503	2200	160 / 179	89
SHL8/180	MM510SL.0180	8000	1503	2200	180 / 199	89
SHL8/200	MM510SL.0200	8000	1503	2200	200 / 219	89
SHL8/220	MM510SL.0220	8000	1503	2200	220 / 239	90
SHL8/240	MM510SL.0240	8000	1503	2200	240 / 269	90
SHL8/270	MM510SL.0270	8000	1503	2200	270 / 300	90